


## Carbon Fiber Unidirectional Fabric



### CUD200-12K/0

C: Fiber Type Carbon Fiber  
UD: Unidirectional  
200: Total Weight 6 oz/sq.yd / 200g/sq.m  
12K: Input roving  
0: Identification Number.

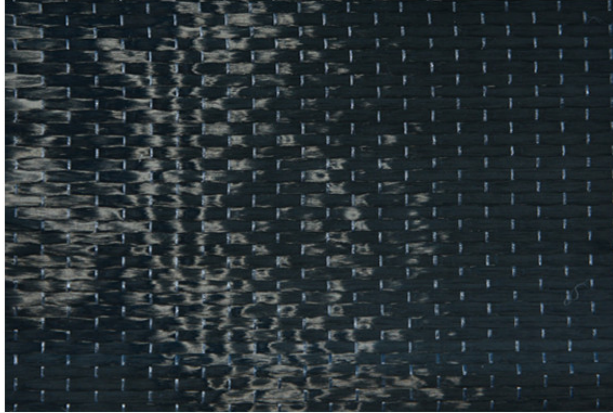

### Technical Parameters

Weight(g/m <sup>2</sup> )	Input roving(tex)	Ends(cm)	Thickness(mm)	Width(mm)	Roll length(m)
	Warp*Weft	Warp * weft			
200	12k * 34tex	2.5 * 1.5	0.111	100-1000	50/100
300	12k * 34tex	3.7 * 1.5	0.167	100-1000	50/100
400	12k * 34tex	4.8 * 1.5	0.222	100-1000	50/100
600	24k * 34tex	3.6 * 1.5	0.334	100-1000	50

\*Packaging: Bag with polyester film, Carton on Pallet.

\*\* Storage: Unless otherwise specified, fiberglass products should be stored in a dry, cool and rain-proof area. The room temperature and humidity should be always maintained at 15℃~35℃ and 35%~65% respectively.